



G5.SAS Solar Array Simulator Series

The G5.SAS series are unidirectional sources. It was developed specifically for testing inverters and simulating solar arrays and is suitable for use in laboratories and on test benches. The modular and finely graded G5.SAS series is characterized by highly dynamic response times and a wide current-voltage range with an auto-ranging factor 3. The power supplies feature especially low capacitance values in the output filter stage and switchable earth leakage resistors for adaptation to the insulation measurement of the DUT. The G5.SAS series is equipped with the powerful application software SASControl, which offers comfortable possibilities for the calculation of solar arrays. I-V curves are calculated with high accuracy in real time. REGATRON PV simulators: The market leader since 2005!

Device Types

Voltage V	Power kW	Current A	Height U	Order Code
0...500	18	0...108	4	G5.SAS.18.500.108
0...500	27	0...162	7	G5.SAS.27.500.162
0...500	36	0...216	7	G5.SAS.36.500.216
0...500	54	0...324	10	G5.SAS.54.500.324
0...1000	18	0...54	4	G5.SAS.18.1000.54
0...1000	36	0...108	7	G5.SAS.36.1000.108
0...1000	54	0...162	10	G5.SAS.54.1000.162
0...1500	27	0...54	7	G5.SAS.27.1500.54
0...1500	54	0...108	10	G5.SAS.54.1500.108

Modular and Easy Scalable Systems

The output of an individual power supply is in the range from 0...18 kW to 0...2000+ kW, up to 3000 VDC. The advantageous modularity of REGATRON power supply solutions allows the system to be easily adapted to ever changing test requirements. Not only is it possible to reconfigure between parallel, series, and mixed operation, but also to expand the system

with additional power supply units or to split it into smaller units.

Therefore, the purchase of a REGATRON power supply is a solid investment for the future.

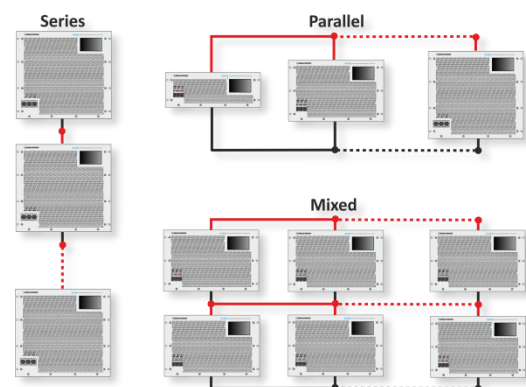


Figure 1: Modular concept for easy power and voltage increase by parallel, series, and mixed operation. The parallel configuration allows even an operation of different power levels, e.g., 18, 36, and 54 kW modules, in one system.

Whether for single devices or powerful multi-device master-slave systems, REGATRON also offers turnkey cabinet solutions or project specific system integration according to customer specifications.

Solar Array Simulation Features

The G5.SAS series features especially low capacitance values in the output filter stage, switchable earth leakage resistors, and the versatile application software SASControl. The powerful platform for R+D and testing of PV inverters fully complies with the efficiency measurement procedures for maximum power point tracking (MPPT) in inverters as described in EN 50530. Core of the application software SASControl is a versatile script programming system which allows the easy implementation of individual programming sequences. Report generation of measured data is also included. Rely on our many years of experience: REGATRON PV simulators are market leaders since 2005!

Features such as adjustable controller settings and the integrated powerful 8-channel digital scope assist the user to quickly and easily achieve optimal system behavior for a special application requirement. The G5.SAS series also offers the possibility to store, edit and recall any device configuration on board the power supply.

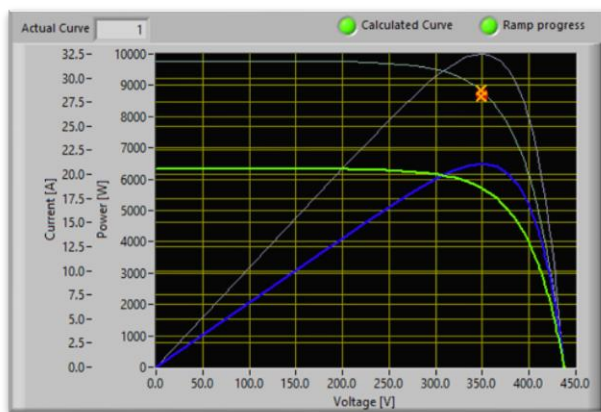


Figure 2: SASControl Live Viewer – always up to date.

General Dynamic Data

rise/fall time	voltage 0...90%	150...200 μ s
set-value step	current 0...90%	50...100 μ s
response time load step	CV, recovery within 0.5% set value	100...150 μ s

Accuracy

The G5.SAS series has an exceptional accuracy of <0.02% FS. There is even an additional high-resolution current measurement range from 0 to 10% FS.

Interfaces

Insulation fault prevention YCD

To avoid an unintentional insulation fault triggering of the PV inverter, the YCD interface of the G5.SAS power supply allows to adapt the earth leakage resistance.

Control Modes

CV	constant voltage
CC	constant current
CP	constant power
Ri	internal resistance simulation

System Control

SASControl	versatile script-programming system
G5.Control	operating and maintenance software
API	.NET programming, e.g., by LabView, Python, Matlab, or REST interface
I/O port	Analog interface for set and actual values, operating states

Grid Connection

The wide-band AC input accepts all common AC grid systems and has an active power factor correction.

AC Grid	380...480 VAC \pm 10% at 50/60 Hz
PF	0.99
Efficiency	95...96%

Options

Software and Control

Time-Based Function Generator

The TFE time-based function generator allows programming either through G5.Control operating software, HMI touch display, or CANmp interface.

- Time-dependent functions $U = f(t)$, $I = f(t)$, $P = f(t)$: sine, triangle, or square as well as user-defined data points. Import and export through csv files supported
- Sweep function for current ripple modulation 0...10 kHz

HMI

The HMI built into the front panel allows comprehensive and convenient operation of the power supply via touch display.



Figure 3: Intuitive control by HMI touch display. Everything you need at a glance.

User Safety

- Integrated safety relay (ISR) for increased emergency stop reliability supporting performance level PL c / PL e according to EN ISO 13849
- Discharge of AC filter (XCD), recommended for mobile use of the device. XCD ensures a discharge time of the AC filter <1 s required by EN 50178
- AC terminal protection cover (PAC.AC), recommended for use as tabletop unit

Rack-Integrated System Solutions

- Mobile rack solutions up to IP54
- Easy reconfiguration between parallel, series, and mixed operation



Figure 4: REGATRON's rack-integrated turn-key system solutions, e.g., 72 kW (left) and 162 kW (right) power levels. Various types of AC/DC connectors and cables allow for comfortable handling. Third-party product integration and numerous safety options are additional features.

Environmental Conditions

Front-panel-mounted air filter (AirFilter), recommended for use in dusty environments.

Important Features of the G5.SAS Series

Technology

- Technologically advanced, fast switching, compact 19-inch power supplies
- High control dynamics in the 100...200 μ s range – even at higher power levels
- Wide current-voltage range with an auto-ranging factor 3
- CV, CC, CP, and Ri-Sim control modes
- Highly efficient, resulting in significant reduction of energy consumption and heat dissipation

System Capability

- Modular and easy scalable systems
- Parallel, series, and mixed operation with a digital high-speed bus
- Simple master-slave configuration with the operating software
- Easy rack mounting
- Optional safety features such as 2-channel safety interface and insulation monitoring
- Turn-key cabinet solutions or project-specific system integration according to customer specification

System Control and Options

- Operating software, extended analysis, parameterization options, and calibration
- Application software with visualization, programming, and data logger
- Powerful application programming interfaces (APIs)

For detailed technical information, contact your local sales partner or Regatron.



All product specifications and information herein are provisional and subject to change without notice.

Filename: PD_G5.SAS_EN_201007.docx

REGATRON DC & AC Power Supplies: Modular · Precisely Engineered · Technologically Advanced

NEW
DC Generation 5

